
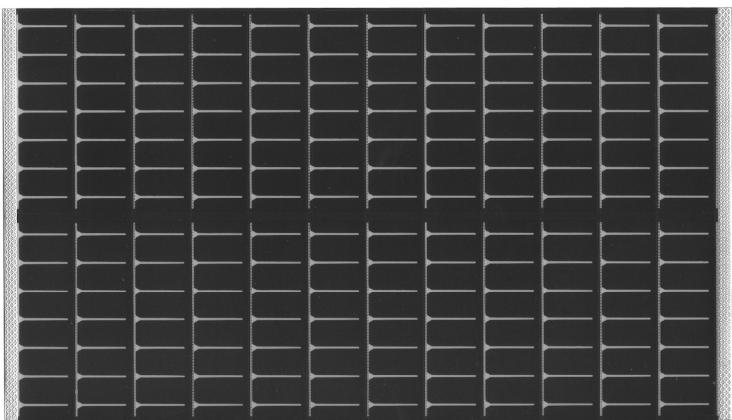


1 2 3 4 5 6 7 8 9

MPT15-150

© 2013 FlexSolarCells

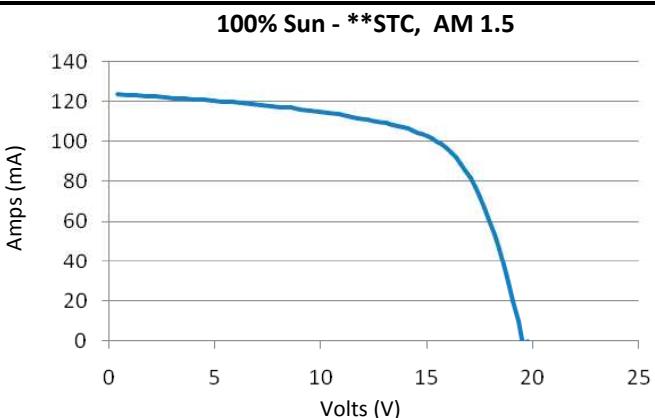

REV.	MODIF.	DATE	DRAW	APPROVE	ECN. No.
V1.0	FIRST ISSUE	9/12/2013	F. Meitzen	R.Anastasi	

ELECTRICAL

PARAMETER	VALUE	UNIT
Wattage	1.54	W
Voltage	15.4	V
Voltage (oc)	19.0	V
Current	100	mA
Current (sc)	120	mA

MECHANICAL

PARAMETER	VALUE	UNIT
Height	0.6 (24)	mm (mils)
Length x Width	150 x 253 (5.9 x 10.0)	mm (inches)
Aperture Size	150 x 240 (5.9 x 9.5)	mm (inches)
Weight	26 (0.9)	g (oz)

Encapsulation	Polyester
Average Lifetime Flexions	1,000
*Average Outdoor Lifespan	6-12 Months

OPERATIONAL

**STC - (Standard Test Conditions) 1,000W/m ² , AM 1.5, 25°C Cell Temperature	
Temperature Departure of Isc	0.07%/K (3.6 mA/K)
Temperature Departure of Voc	-0.26%/K (-57 mV/K)
Temperature Departure of Pmax	-0.19%/K (-110.4 mW/K)
Temperature Departure of Imp	0.07%/K (2.4 mA/K)
Temperature Departure of Vmp	-0.24%/K (-41 mV/K)

NOTES

- *Average Outdoor Lifespan based on the absence of additional shielding or protection.
- During first 8-10 weeks of operation, electrical output may exceed specified ratings.
- Electrical specifications are based on measurements performed at **STC after stabilization.
- Performance may vary from rated power due to temperature and/or spectral fluctuations.

Part Name	MPT15-150	中国语文 http://www.rourentaiyangneng.com
Part Number	F10G	Deutsch http://www.flexiblesolarzellen.com
		Español http://www.celdassolaresflexibles.com
		Française http://www.panneauxsolairesflexibles.com